

Harlequin WoodSpring™

Harlequin WoodSpring is a permanently installed sprung floor system. It's a modern update of the traditional 'basket weave' construction that originated in the 19th Century but with 21st Century advancements.

Harlequin WoodSpring is comprised of a layer of select Class 3 Exterior (EN 314) plywood, a triple-layer of custom machined southern yellow pine laid at right angles, with shock absorption and energy return enhanced by dual density elastomer blocks attached at predetermined intervals to the underside.


Harlequin WoodSpring is installed by our own highly-skilled technical team and all work is fully guaranteed. Different surface options include:

- A Harlequin vinyl performance floor, selected from our range
- Solid hardwood - in beech, oak or maple
- Engineered board with a hardwood wear layer - in beech, oak or maple.

If a Harlequin vinyl performance floor is chosen, a moisture resistant suspension board will be included underneath, along with a colour matched composite edging profile, which will be installed around the finished edges. If solid hardwood or engineered board is chosen, the skirting will be 'optional'.

Specification guide

Permanent or Portable	Permanent
Minimum floor thickness (before inclusion of chosen finish)	91mm
Minimum floor weight (before inclusion of chosen finish)	24kg/m ²
Testing standards	BS EN 14904-2006
Average shock absorption	64%
Maximum point load (BS EN 1195)	924kg
Area deflection	14.9%
Rolling load	>1500N
Vertical deformation	3.3mm

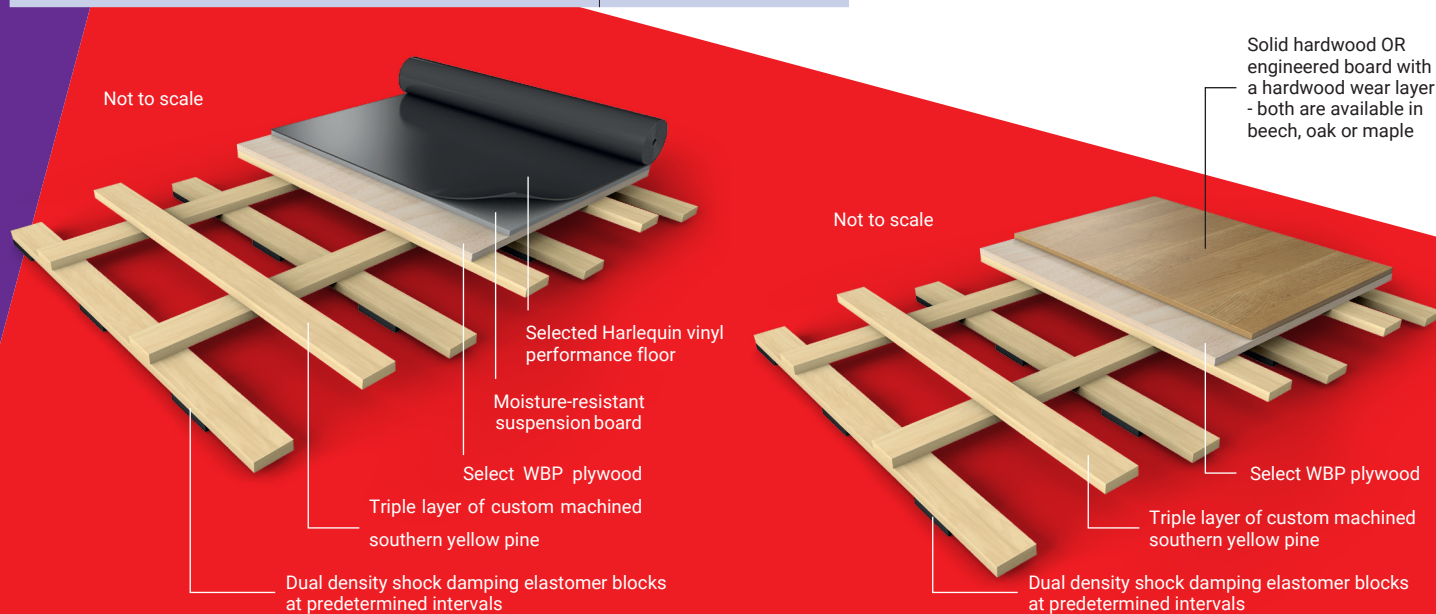

If you would like further information, advice and samples please contact us on +352 46 44 22 or info@harlequinfloors.com



HARLEQUIN
www.harlequinfloors.com