


# Harlequin Tape

# Doubled-Sided Vinyl Floor Tape, NEC Approved

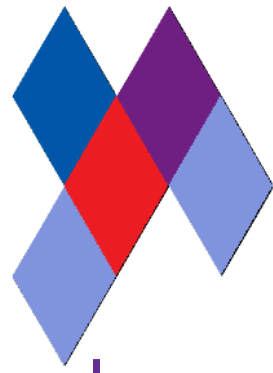

Harlequin high tack/low tack double-sided floor tape for use when taping the underside of a Harlequin vinyl performance floor to a sub-floor.

The low-tack adhesive on the open side gives good adhesion to a wide variety of clean dry surfaces and enables easy-peel removal without damaging the floor and leaving no residue\*.

The high tack adhesive on the closed side gives a stronger, permanent adhesion to the Harlequin performance vinyl.

- High tack / low tack allows for easy peel without damaging the floor surface
- NEC approved, ideal for short term exhibition use
- Clean peel, enables easy removal without leaving a residue\*
- Water based adhesive
- RoHS compliant

\* Some surfaces can cause the adhesive to transfer, always test on a small area first.

## Specification Guide

Roll Width	50mm
Roll Length	50m
Thickness	0.15mm
Breaking Load	23 N/cm
Release Linear Weight	80gsm
Faced Side	6.0 N/cm
Unfaced Side	2.0 N/cm
Elongation	165%
Service Temperature	-5°C to + 60°C
Application Temperature	0°C to + 40°C
Storage Temperature	+12°C to + 25°C
RoHS Compliant	Yes



If you would like further information or advice please contact us on  
**+44 (0) 1892 514 888 or [enquiries@harlequinfloors.com](mailto:enquiries@harlequinfloors.com)**

The Company reserves the right to make any variation in design or construction of the material described. Harlequin ® is a registered trademark of British Harlequin plc. © Harlequin Floors 08/2024



**HARLEQUIN**  
[www.harlequinfloors.com](http://www.harlequinfloors.com)

LONDON ♦ LUXEMBOURG ♦ BERLIN ♦ MADRID ♦ PARIS ♦ LIEGE ♦ PHILADELPHIA ♦ LOS ANGELES ♦ FORT WORTH ♦ SYDNEY ♦ HONG KONG ♦ TOKYO