


Harlequin Tape

Double-sided floor tape, NEC approved

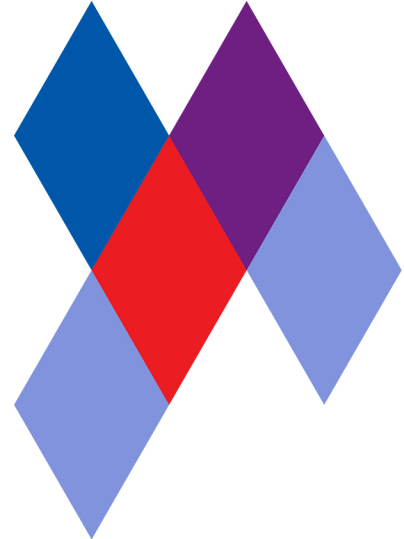

Harlequin high tack/low tack double-sided floor tape for use when taping the underside of a Harlequin vinyl performance floor to a sub-floor.

The low-tack acrylic adhesive on the open side gives good adhesion to a wide variety of clean dry surfaces and enables easy-peel removal without damaging the floor and leaving no residue*.

The high tack adhesive on the closed side gives a stronger, permanent adhesion to the Harlequin performance vinyl.

- High tack / low tack allows for easy peel without damaging the floor surface
- NEC approved, ideal for short term exhibition use
- Clean peel, enables easy removal without leaving a residue*
- Water based adhesive
- RoHS compliant

* Some surfaces can cause the adhesive to transfer, always test on a small area first.

Specification guide

Roll width	50mm
Roll length	50m
Colours available	Green
Tape thickness	0.15mm
Release liner weight	80gsm
Breaking load	20 N/cm
Elongation	210%
Adhesion to Steel	
Faced side	7.2 N/cm
Unfaced side	2.5 N/cm
RoHS compliant	Yes
Service temperature	-10°C to +50°C
Application temperature	0°C to +40°C
Storage temperature	+12°C to +25°C



If you would like further information, advice and samples please contact us on +44 (0) 1892 514 888 or enquiries@harlequinfloors.com



HARLEQUIN
www.harlequinfloors.com